

02-15-00

Case Docket No. PHF 99-509

A

THE COMMISSIONER OF PATENTS AND TRADEMARKS, Washington, D.C. 20231

Enclosed for filing is the patent application of Inventor(s):
PIERRE CHANTEAU, REYNALD EDOUARD AND AMERICO BRAJALFor: METHOD OF TRANSMITTING RETURN SIGNALS TO A SATELLITE FROM A
VIDEOCOMMUNICATION SIGNAL DISTRIBUTION NETWORK**ENCLOSED ARE:**

- ☒ Associate Power of Attorney;
☒ Information Disclosure Statement, Form PTO-1449 and copies of documents listed therein;
☐ Preliminary Amendment;
☒ Specification (9 Pages of Specification, Claims, & Abstract);
☒ Declaration and Power of Attorney:
(2 Pages of a ☐ fully executed ☒ unsigned Declaration);
☒ Drawing (sheets of ☐ informal ☐ formal sheets);
☒ Certified copy of FRENCH application Serial No. 9901971;
☒ Other: CHARGE AUTHORIZATION
☐ Assignment to .

FEE COMPUTATION

CLAIMS AS FILED				
FOR	NUMBER FILED	NUMBER EXTRA	RATE	BASIC FEE - 690.00
Total Claims	13 - 20 =	0	X \$18 =	0.00
Independent Claims	4 - 3 =	1	X \$78 =	78.00
Multiple Dependent Claims, if any			\$260 =	0.00
TOTAL FILING FEE			=	\$768.00


Please charge Deposit Account No. 14-1270 in the amount of the total filing fee indicated above, plus any deficiencies. The Commissioner is also hereby authorized to charge any other fees which may be required, except the issue fee, or credit any overpayment to Account No. 14-1270.

☐ Amend the specification by inserting before the first line the sentence: --This is a continuation-in-part of application Serial No. , filed .--.

CERTIFICATE OF EXPRESS MAILING

Express Mail Mailing Label No. EL33554962145
Date of Deposit February 14, 2000
I hereby certify that this paper and/or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.

Josephine Cangelosi
Typed Name Signature



Daniel J. Piotrowski, Reg. 42,079
Attorney
(914) 333-9624
U.S. Philips Corporation
580 White Plains Road
Tarrytown, New York 10591
S:\P\WMQ19PWA0.CNO

jc674 U.S. PTO

jc675 U.S. PTO
09/503966

02/14/00

09503966-021400

Method of transmitting return signals to a satellite from a videocommunication signal distribution network.

The present invention relates to a method of transmitting signals called return signals from a signals distribution network comprising an antenna system that is capable of transmitting return signals to a satellite in a first frequency band based on signals received from the network in a second frequency band which lies in the upper part of the television frequency band used in the network, in which method signals comprising, inter alia, data for the frequency management of the return signals are received in a channel called downstream channel intended to serve a plurality of user receivers.

The invention also relates to a signals distribution network comprising an antenna system that is capable of transmitting signals called return signals to a satellite in a first frequency band based on signals received from the network in a second frequency band which lies in the upper part of the television frequency band used in the network, and comprising a channel called downstream channel intended to supply signals to a plurality of user receivers and producing, inter alia, data for the frequency management of the return signals.

The invention further relates to a unit intended to serve as an interface between a signals distribution network and a user receiver, and a frequency translation unit intended to serve as an interface between a videocommunication network and an antenna system.

Such a method and such devices are provided, inter alia, to enable homeworking for which a satellite communication with the employer is used. They may also be used in any type of telecommunication.

Such an antenna system, associated to a user receiver, is known from the document "Description of an Interactive Satellite System based on the European ACTS ISIS project", in ITU TELECOM Inter@ ctive 97, Session GII.6. According to this document, return signals are produced at an intermediate frequency "IF" known to a person of ordinary skill in the art to lie between 2.5 and 3 GHz, and they are converted to the band Ka (29.5-30 GHz) to be transmitted to the satellite.

For optimizing the return of data to a satellite, the operator assigns the channels for the return signals in a dynamic manner, and frequency positioning data relating to the transmission in the band Ka are transmitted to the users in the downward stream which is

brought to the user device via a cable called "receiving" cable. This downward stream is the normalized stream DVB-S which transports in MPEG2-TS packets both technical signaling signals and applications requested by users.

An interactive user receiver utilizes these data for the frequency control of an agile synthesizer which produces a return channel signal whose center frequency may vary between 2.5 and 3 GHz. This signal goes up from the receiver via another cable than the receiving cable to the transmitter in the band Ka where a predefined conversion translates it to between 29.5 and 30 GHz. This concept, in which the frequency agility is concentrated at the level of the receiver, in essence has three drawbacks in an SMATV system:

- The necessity of using two cables on the entire link between the antenna and the interactive receiver;
- The use of a 2.5 to 3 GHz frequency band for a coaxial cable return channel, which is in conflict with the 88 MHz to 3 GHz frequency band of the downstream channel of the current SMATV systems;
- A bandwidth of the return channel that is much larger than that of the conventional return channels: 500 MHz to be compared with the 60 MHz of the European normalized return channel which stretches out from 5 to 65 MHz maximum. The 500 MHz bandwidth of this return channel is only justified by the necessity of a frequency agility of 500 MHz, that is to say, the possibility of changing the frequency at any moment within a 500 MHz band, whereas the net rates considered (several hundred kbits/s) are infinitely less selectable in the passband.

It is an object of the invention to permit the use of the transmission method in collective distribution networks by removing the drawbacks mentioned above. The passband used for transmitting the data back into the network is to be much less than 500 MHz, and yet a final agility that can run up to 500 MHz is required.

For this purpose, the return signals are transmitted through the network from a user receiver with a frequency lying below the television frequency band used in the network, these return signals are subjected to a frequency translation on the output of the network to the antenna system, so that they are delivered to the antenna system to be transmitted there with a frequency lying in the second frequency band, and the frequency management data received in the downstream channel are used during the said frequency translation to select the frequency to be produced in the second frequency band.

A signals distribution network according to the invention comprises a complementary unit which plays the role of interface between the usual elements of the network and a user receiver and is formed by first means for receiving from the network and

delivering to the user receiver the downstream channel signals and the frequency management data, and for transmitting, from a user receiver to the network, return signals whose frequency lies below the television frequency band used in the network and frequency management data, a frequency translation unit which plays the role of interface between the usual elements of the network and the antenna system and is formed by second means for receiving return signals whose frequency lies below the television frequency band used in the network, for subjecting these return signals to a frequency translation that brings them to the second frequency band, and for delivering these return signals, after translation, to the antenna system to be transmitted there by this system, and third means for transmitting to the frequency translation unit frequency management data which are received via the network, intended to permit the second means to select the frequency to be used in the second frequency band.

A unit, intended to serve as an interface between a signals distribution network and a user receiver comprises means for receiving from the network and delivering to the user receiver downstream channel signals and data for managing the return frequencies and for transmitting from the user receiver to the network, return signals whose frequency lies below the television frequency band used in the network and the frequency management data.

A frequency translation unit intended to serve as an interface between a network and an antenna system includes means for receiving return signals whose frequency lies below the television frequency band used in the network, for subjecting these return signals to a frequency translation that brings them to a second frequency band situated high up in the television frequency band used in the network, and for delivering these return signals, after translation, to the antenna system to be transmitted there by this system.

Particular embodiments of the invention will appear in the dependent claims 2-5 and 7-11.

These and other aspects of the invention are apparent from and will be elucidated, by way of non-limitative example, with reference to the embodiments described hereinafter.

In the drawings:

Fig. 1 is a diagram showing a signals distribution network, comprising an antenna system and connected to a user receiver, and

Fig. 2 shows in more detail a control data link between a frequency translation unit and a complementary unit.

In the system shown in Fig. 1, the user receiver device, which interacts with a transmitter, is a personal computer, for example of the type "PC". It is evident that the invention could also be applied to other types of devices, for example, a digital television decoder which uses the same physical and access control layers.

5 The antenna system comprises a dish antenna 1 at the focus of which is located a traditional receiving converter, for example, for MPEG2 DVB signals in the band Ku (12 GHz). The return channel is transmitted to the satellite via a transmitter situated practically also in the focus of the dish antenna, which sends return signals, for example here in the band Ka. A return signal occupies a band whose width may lie between 100 kHz and 3 MHz. For
10 example, signals are to be transmitted whose rate is 1 Mbits/s.

In a converter unit up-C the frequency agility in a system according to the invention is moved to above the distribution network. If necessary, this unit also provides the remote power supply of the transmitter.

15 The transmission in the band Ka is effected according to a frequency-division process and also time-division process: each user is authorized to transmit in a time window, this window being determined by the operator of the satellite transmission and its definition being transmitted in the form of data in the downward stream; for this purpose, the operator is to know the list of the users who are grouped in the same collective distribution network "SMATV", because the same time window must not be assigned to two users of this network,
20 whereas this can be done for two users of different SMATV networks.

A unit called complementary unit CB receives the downstream data from the receiving cable in a channel it selects in the 88 MHz-3 GHz band; the downstream data are not in conflict with the return channel data which are produced by the complementary unit CB in a 20-60 MHz frequency band, for example, with a fixed center frequency of 44 MHz. A limited
25 band from 20-60 MHz is chosen although the 5-65 MHz band is available, in order to make room for technical signals for controlling the transmitter.

The personal computer PC comprises, inter alia:

- a pulse modulator/demodulator B.M for supplying in the form of I²C coded signals digital data to the unit CB, or receiving them therefrom; this element B.M. comprises a processor that
30 can process the management data of the return frequencies, received in the downstream channel, so as to give orders resulting therefrom to the network;
- a receiver for receiving digital videocommunication transmissions PC-DVB which receives and demodulates digital videocommunication transmissions coming from this same unit;
- an interface PCI provided between these two elements.

The I²C signals, in addition to frequency data, convey data for adjusting the power level of the transmitter in the band Ka.

A modulation of the I²C data is realized in the complementary unit CB so as to permit the routing through the network.

5 The 44 MHz channel is transposed in the unit up-C into a channel lying, for example, between 2.5 and 3 GHz, that is to say, high up in or above the television frequency band used in the network. The frequency in this channel is chosen as a function of the I²C data produced by the complementary unit CB.

10 The system transmits downstream signals, here at 433 MHz, to the unit CB from the unit up-C, return signals at 10.7 and 13 MHz for controlling the translation as well as habitual signals 13/18V-22 kHz DiSEcQ for controlling switches SMATV.

15 In Fig. 2 the complementary unit CB sends clock signals SCL via the network symbolized by a dotted line and it receives and sends data signals SDA. The clock signals SCL, which are transmitted at the same time as the data SDA during the return transmit time windows, are modulated at 10.7 MHz in a modulator 2 and filtered in a bandpass filter 5. The transmitted data signals SDA are modulated at 13 MHz in a modulator 3 and filtered in a bandpass filter 6. The received data signals SDA are filtered at 433 MHz in a bandpass filter 7 and demodulated in a demodulator 4.

20 The unit up-C receives clock signals SCL and it receives and sends data signals SDA. The clock signals SCL pass through a bandpass filter 5 at 10.7 MHz and are demodulated in a demodulator 11. The received signals SDA pass through a bandpass filter 9 at 13 MHz and are demodulated in a demodulator 12. The signals SDA which are sent are modulated at 433 MHz in a modulator 13 and pass through a bandpass filter 10.

25 It should be understood that the verb "to comprise" does not exclude the presence of other elements or steps than those listed in a claim.

CLAIMS:

1. A method of transmitting signals called return signals from a signals distribution network comprising an antenna system that is capable of transmitting return signals to a satellite in a first frequency band based on signals received from the network in a second frequency band which lies in the upper part of the television frequency band used in the network, in which method signals comprising, inter alia, data for the frequency management of the return signals are received in a channel called downstream channel intended to serve a plurality of user receivers, characterized in that:

- the return signals are transmitted through the network from a user receiver with a frequency lying below the television frequency band used in the network,
- these return signals are subjected to a frequency translation on the output of the network to the antenna system, so that they are delivered to the antenna system with a frequency lying in the second frequency band, and
- the frequency management data received in the downstream channel are used during said frequency translation to select the frequency to be produced in the second frequency band.

2. A method as claimed in claim 1, characterized in that the return signals are transmitted through the network in the 20-60 MHz frequency band.

3. A method as claimed in claim 1, characterized in that the management data of the return frequencies, which are received in the downstream channel, are processed in the user receiver after which orders resulting therefrom are supplied to the network.

4. A method as claimed in claim 3, characterized in that the signals representing said orders are coded in the form known as I²C.

5. A method as claimed in claim 4, characterized in that I²C clock signals are modulated on a first frequency to be transmitted from the user receiver to the antenna system, I²C data signals are modulated on a second frequency to be transmitted from the user receiver

to the antenna system, and I²C data signals are modulated on a third frequency to be transmitted from the antenna system to the user receiver.

6. A signals distribution network comprising an antenna system that is capable of transmitting signals called return signals to a satellite in a first frequency band based on signals received from the network in a second frequency band which lies in the upper part of the television frequency band used in the network, and comprising a channel called downstream channel intended to supply signals to a plurality of user receivers and conveying, inter alia, data for the frequency management of the return signals, characterized in that it comprises:

- a unit called complementary unit which plays the role of interface between the usual elements of the network and a user receiver and is formed by first means for receiving from the network and delivering to the user receiver the downstream channel signals and the frequency management data, and for transmitting, from a user receiver to the network, return signals whose frequency lies below the television frequency band used in the network and frequency management data,
- a frequency translation unit which plays the role of interface between the usual elements of the network and the antenna system and is formed by second means for receiving return signals whose frequency lies below the television frequency band used in the network, for subjecting these return signals to a frequency translation that brings them to the second frequency band, and for delivering these return signals, after translation, to the antenna system to be transmitted by this system;
- third means for transmitting to the frequency translation unit frequency management data which are received via the network, intended to permit the second means to select the frequency to be used in the second frequency band.

7. A signals distribution network as claimed in claim 6, characterized in that the first means transmit the return signals in the 20-60 MHz frequency band.

8. A signals distribution network as claimed in claim 6, characterized in that the frequency translation unit comprises means for using frequency management data which are sent thereto via the network.

9. A signals distribution network as claimed in claim 8, characterized in that the complementary unit comprises means for receiving, modulating and transmitting to the network signals that represent said management data, which are brought thereto in the form of I²C data, and the frequency translation unit comprises means for receiving and demodulating the said I²C data.

10. A signals distribution network as claimed in claim 9, characterized in that the complementary unit comprises means for modulating I²C clock signals on a first frequency and transmitting them to the network, the frequency translation unit comprises means for receiving I²C clock signals from the network and demodulating them, the complementary unit comprises means for modulating I²C data signals on a second frequency and transmitting them to the network, the frequency translation unit comprises means for receiving I²C data signals from the network and demodulating them at this second frequency, the frequency translation unit comprises means for modulating I²C data signals on a third frequency and transmitting them to the network, and the complementary unit comprises means for receiving I²C data signals from the network and demodulating them at the third frequency.

11. A signals distribution network as claimed in claim 6, characterized in that the complementary unit and the frequency translation unit also provide the remote power supply of the transmitter.

12. A unit intended to serve as an interface between a signals distribution network and a user receiver, comprising means for receiving downstream channel signals and frequency management data from the network and delivering them to the user receiver, and for transmitting return signals from the user receiver to the network of which return signals the frequency lies below the television frequency band used in the network and frequency management data.

13. A frequency translation unit intended to serve as an interface between a network and an antenna system, including means for receiving return signals whose frequency lies below the television frequency band used in the network, for subjecting these return signals to a frequency translation that brings them to a second frequency band situated high up in the television frequency band used in the network, and for delivering these return signals, after translation, to the antenna system to be transmitted by this system.

Year	Age	Sex	Location	Species	Count	Notes
1970	10	M	1000	1000	1000	1000
1971	11	F	1000	1000	1000	1000
1972	12	M	1000	1000	1000	1000
1973	13	F	1000	1000	1000	1000
1974	14	M	1000	1000	1000	1000
1975	15	F	1000	1000	1000	1000
1976	16	M	1000	1000	1000	1000
1977	17	F	1000	1000	1000	1000
1978	18	M	1000	1000	1000	1000
1979	19	F	1000	1000	1000	1000
1980	20	M	1000	1000	1000	1000
1981	21	F	1000	1000	1000	1000
1982	22	M	1000	1000	1000	1000
1983	23	F	1000	1000	1000	1000
1984	24	M	1000	1000	1000	1000
1985	25	F	1000	1000	1000	1000
1986	26	M	1000	1000	1000	1000
1987	27	F	1000	1000	1000	1000
1988	28	M	1000	1000	1000	1000
1989	29	F	1000	1000	1000	1000
1990	30	M	1000	1000	1000	1000
1991	31	F	1000	1000	1000	1000
1992	32	M	1000	1000	1000	1000
1993	33	F	1000	1000	1000	1000
1994	34	M	1000	1000	1000	1000
1995	35	F	1000	1000	1000	1000
1996	36	M	1000	1000	1000	1000
1997	37	F	1000	1000	1000	1000
1998	38	M	1000	1000	1000	1000
1999	39	F	1000	1000	1000	1000
2000	40	M	1000	1000	1000	1000
2001	41	F	1000	1000	1000	1000
2002	42	M	1000	1000	1000	1000
2003	43	F	1000	1000	1000	1000
2004	44	M	1000	1000	1000	1000
2005	45	F	1000	1000	1000	1000
2006	46	M	1000	1000	1000	1000
2007	47	F	1000	1000	1000	1000
2008	48	M	1000	1000	1000	1000
2009	49	F	1000	1000	1000	1000
2010	50	M	1000	1000	1000	1000
2011	51	F	1000	1000	1000	1000
2012	52	M	1000	1000	1000	1000
2013	53	F	1000	1000	1000	1000
2014	54	M	1000	1000	1000	1000
2015	55	F	1000	1000	1000	1000
2016	56	M	1000	1000	1000	1000
2017	57	F	1000	1000	1000	1000
2018	58	M	1000	1000	1000	1000
2019	59	F	1000	1000	1000	1000
2020	60	M	1000	1000	1000	1000
2021	61	F	1000	1000	1000	1000
2022	62	M	1000	1000	1000	1000
2023	63	F	1000	1000	1000	1000
2024	64	M	1000	1000	1000	1000
2025	65	F	1000	1000	1000	1000
2026	66	M	1000	1000		



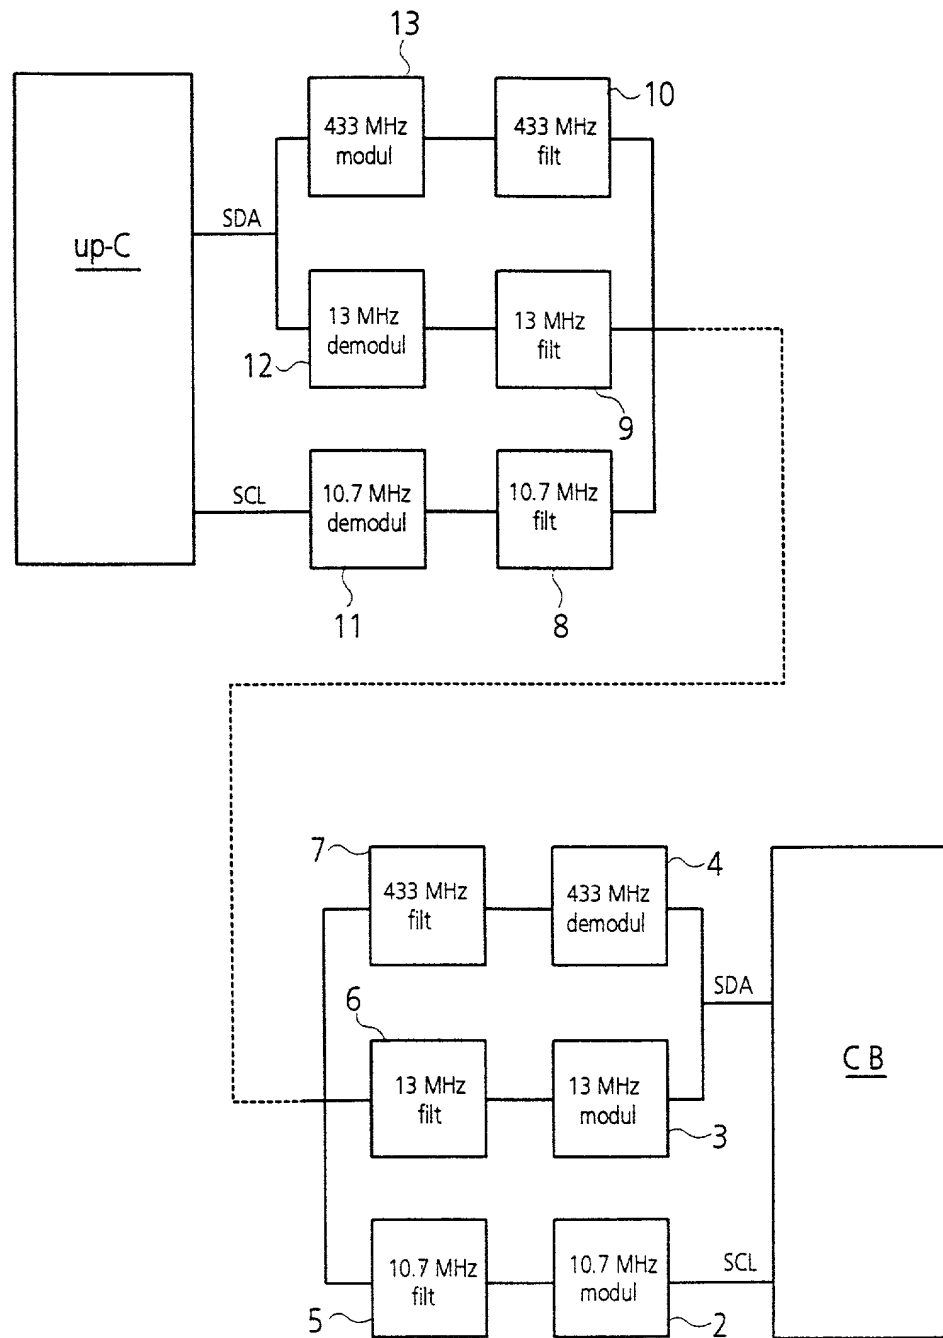


FIG.2

DECLARATION and POWER OF ATTORNEY

ATTORNEY'S DOCKET NO.:

PHF 99.509 US

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled "**Method of transmitting return signals to a satellite from a videocommunication signal distribution network**" the specification of which (check one)

☐ is attached hereto.

☐ was filed on _____ as Application Serial No. _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by the amendment(s) referred to above.

I acknowledge the duty to disclose information which is material to patentability of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

PRIOR FOREIGN APPLICATION(S)

COUNTRY	APP. NUMBER	DATE OF FILING (DATE, MONTH, YEAR)	PRIORITY CLAIMED UNDER 35 U.S.C. 119
France	9901871	16 February 1999	YES

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35 United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

PRIOR UNITED STATES APPLICATION(S)

APPLICATION SERIAL NUMBER	FILING DATE	STATUS (PATENTED, PENDING, ABANDONED)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Algy Tamoshunas, Reg. No. 27,677

Jack E. Haken, Reg. No. 26,902

SEND CORRESPONDENCE TO: Corporate Patent Counsel; U.S. Philips Corporation; 580 white Plains Road; Tarrytown, NY 10591	DIRECT TELEPHONE CALLS TO: (name and telephone No.) (914) 332-0222
--	--

Dated:		Inventor's Signature:	
Full Name of in Inventor	Last Name CHANTEAU	First Name Pierre	Middle Name
Residence & Citizenship	City La Haye Malherbe	State of Foreign Country France	Country of Citizenship France
Post Office Address	Street 12, rue Chanceuse	City 27400 La Haye Malherbe	State of Country France
Zip Code			
Dated:		Inventor's Signature:	
Full Name of in Inventor	Last Name EDOUARD	First Name Reynald	Middle Name
Residence & Citizenship	City Val de Reuil	State of Foreign Country France	Country of Citizenship France
Post Office Address	Street 33 voie MarmailleProf.	City 27100 Val De Reuil	State of Country France
Zip Code			

Dated:		Inventor's Signature:		
Full Name of in Inventor	Last Name BRAJAL	First Name Américo	Middle Name	
Residence & Citizenship	City Villeneuve Le Roi	State of Foreign Country France	Country of Citizenship Portugal	
Post Office Address	Street 54 rue Jean-Jacques Rousseau	City 94290 Villeneuve Le Roi	State of Country France	Zip Code

Dated:		Inventor's Signature:		
Full Name of in Inventor	Last Name	First Name	Middle Name	
Residence & Citizenship	City	State of Foreign Country	Country of Citizenship	
Post Office Address	Street	City	State of Country	Zip Code

Dated:		Inventor's Signature:		
Full Name of in Inventor	Last Name	First Name	Middle Name	
Residence & Citizenship	City	State of Foreign Country	Country of Citizenship	
Post Office Address	Street	City	State of Country	Zip Code

Dated:		Inventor's Signature:		
Full Name of in Inventor	Last Name	First Name	Middle Name	
Residence & Citizenship	City	State of Foreign Country	Country of Citizenship	
Post Office Address	Street	City	State of Country	Zip Code

Dated:		Inventor's Signature:		
Full Name of in Inventor	Last Name	First Name	Middle Name	
Residence & Citizenship	City	State of Foreign Country	Country of Citizenship	
Post Office Address	Street	City	State of Country	Zip Code

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of
PIERRE CHANTEAU ET AL

Atty. Docket
PHF 99-509

Serial No.

Group Art Unit:

Filed: CONCURRENTLY

Examiner:

METHOD OF TRANSMITTING RETURN SIGNALS TO A SATELLITE FROM A
VIDEOCOMMUNICATION SIGNAL DISTRIBUTION NETWORK

Honorable Commissioner of Patents and Trademarks
Washington, D.C. 20231

APPOINTMENT OF ASSOCIATES

Sir:

The undersigned Attorney of Record hereby revokes all
prior appointments (if any) of Associate Attorney(s) or Agent(s) in
the above-captioned case and appoints:


DANIEL J. PIOTROWSKI

(Registration No. 42,079)

c/o U.S. PHILIPS CORPORATION, Intellectual Property Department, 580
White Plains Road, Tarrytown, New York 10591, his Associate
Attorney(s)/Agent(s) with all the usual powers to prosecute the
above-identified application and any division or continuation
thereof, to make alterations and amendments therein, and to
transact all business in the Patent and Trademark Office connected
therewith.

ALL CORRESPONDENCE CONCERNING THIS APPLICATION AND THE
LETTERS PATENT WHEN GRANTED SHOULD BE ADDRESSED TO THE UNDERSIGNED
ATTORNEY OF RECORD.

Respectfully,

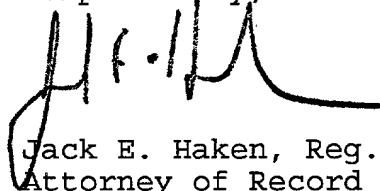

Jack E. Haken, Reg. 26,902
Attorney of Record

Dated at Tarrytown, New York
this 19TH day of JANUARY, 2000

C:\USAPPS\APPASOC.PT

001120 99050500